

Modular MMC Tank Capacitors

DT-200 (TH/HD/UC)

Stackable capacitor modules for high frequency, high current resonators



Features and Specifications

- Compact & stackable for unlimited capacitance
- M3 screw connection & mounting holes
- High frequency & high current capable
- Integrated passive cooling with large surface area
- Quadruple 2oz copper layers
- Addon module for the CRO-SM3 induction heater
- Up to 200V DC

Typical Usage

The DT-200 range of modular tank capacitors are ideal for use in high current resonant systems such as **induction heaters** where small size and high frequency capability are critical. The TH model is for low-cost options, while the HD and HC versions are for space saving and high frequency applications.




 <p>DT-200-TH Low Cost MMC Tank Capacitor DT-200-TH</p> <p>Quality UK Made</p> <p>Stackable tank capacitors for compact resonant systems Only 50mm x 50mm x 18mm 330nF to 2.6µF per module. Unlimited parallel capacity.</p>	 <p>DT-200-HD High Density MMC Tank Capacitor DT-200-HD</p> <p>Quality UK Made</p> <p>Stackable tank capacitors for compact resonant systems Only 50mm x 50mm x 4.4mm (>1.7µF 7.2mm) 100nF to 3.4µF per module. Unlimited parallel capacity.</p>	 <p>DT-200-UC Ultra Compact MMC Tank Capacitor DT-200-UC</p> <p>Quality UK Made</p> <p>Stackable tank capacitors for compact resonant systems Only 50mm x 50mm x 2.7mm (>170nF 3.5mm) 10nF to 340nF per module. Unlimited parallel capacity.</p>
Highest capacitance vs cost	Highest capacitance vs size	Smallest size
330nF to 2.6µF	100nF to 3.4µF	10nF to 340nF
Polypropylene dielectric	COG / NP0 dielectric	COG / NP0 dielectric
10kHz to 200kHz ¹	10kHz to 300kHz ¹	50kHz to 1000kHz ¹
Low cost and good all-round use	For highly compact systems	Great for high frequency use

Table 1: Comparison of DT-200 versions
¹ Frequency range is a guide only

Modular Design


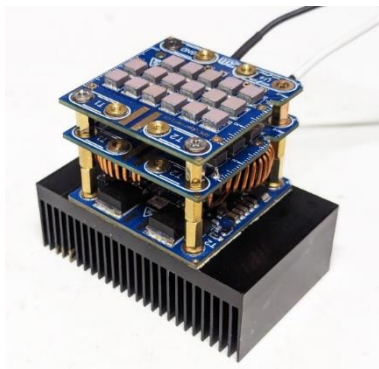


Figure 1: Stacked Modules Example

The DT-200 modules are designed for use with our CRO-SM3 induction heater module. These boards can be mounted to the CRO-SM3 module using standoffs with a spacing to suit your application. With a variety of capacitances available, it is simple to add or change the working capacitance and therefore the resonant frequency of an induction heating system. By simply adding or removing modules, the frequency can be reduced or increased accordingly.


Connections

Main power connections are made using the integrated M3 nuts so that they can be screwed to standard M3 standoffs and stacked together. There are also several solder points available for those wanting to fix chokes to the board. The chokes (shown in green) need to connect between the power supply and the T1/T2 connections. This can be done in a variety of ways. Some examples are shown below. The red lines represent the internal wiring of the PCB, while the green ones represent external connections for adding chokes.

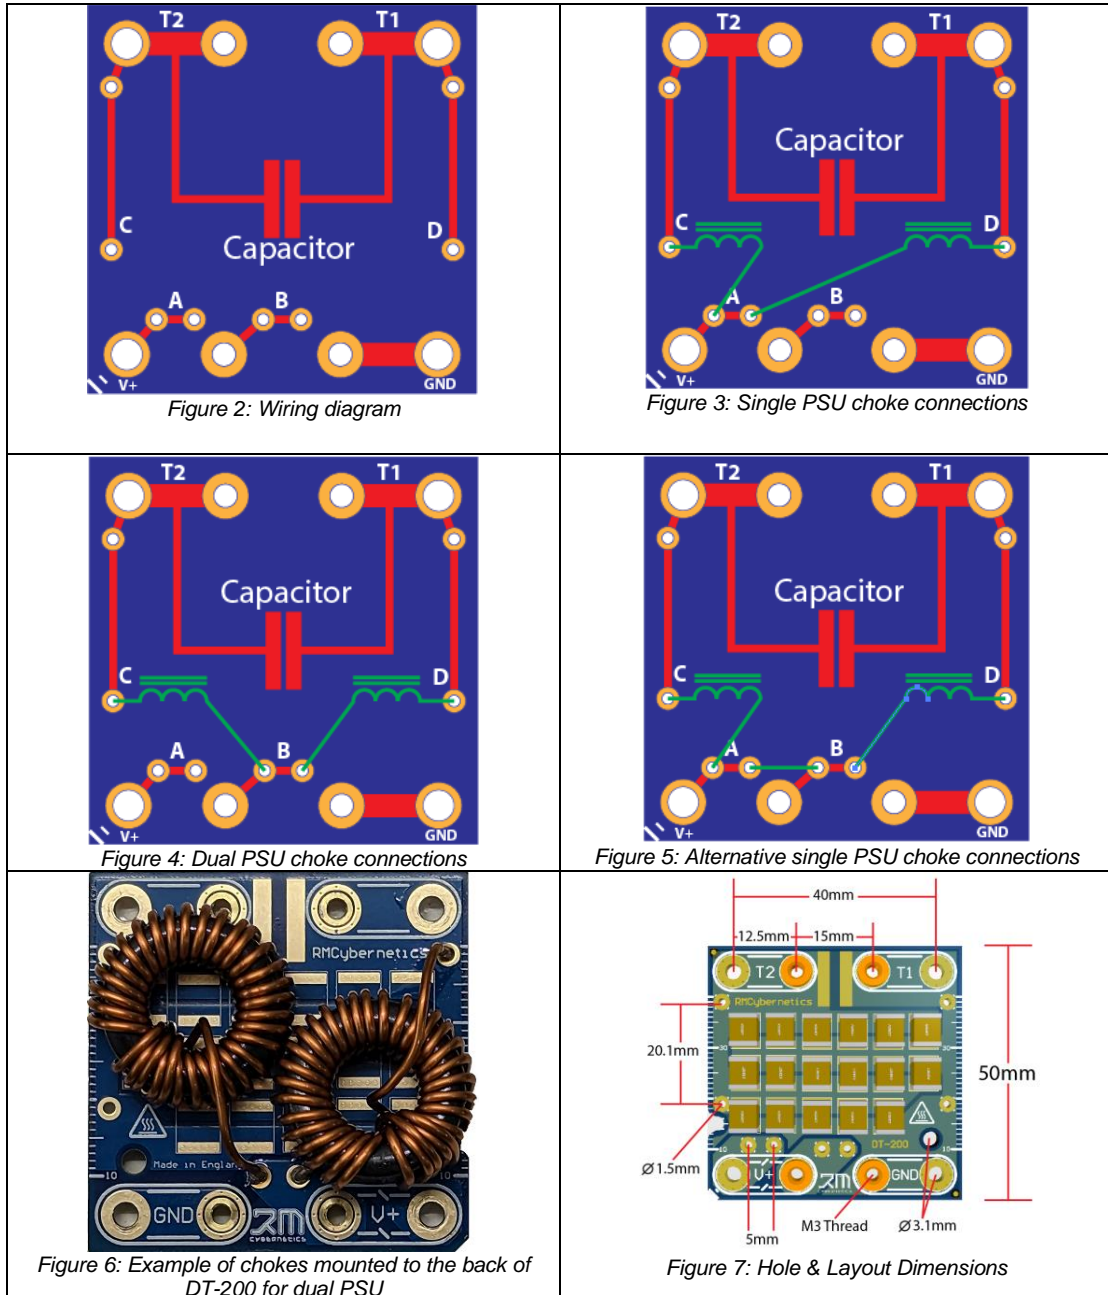



CUSTOM INDUCTION HEATING SYSTEMS



Built to your Specifications
 +44 1270 747008
info@rmcybernetics.com



Customisation is available for this product



We can write custom firmware for this product, make custom coils, and help integrate it into your project. Call or email to discuss your requirements.

Tel: 01270 747008 – Email: info@rmcybernetics.com

Related Products

Product	MPN
Micro Induction Heater Circuit	CRO-SM3
5kW Induction Heater	IHM-5K
High Frequency Litz Wire	LITZ
12V, 30A PSU	12V30ASMPS
PWM Circuit	PWM-OCX
Choke 15A, 100uH	CHK-15A
Heatsinks	See Website

The information in this document is provided as-is and is not guaranteed to be free of errors.

RM Cybernetics LTD

31 Lawton Road

Alsager

Cheshire

ST7 2AA

United Kingdom

01270 747 008 (+44 1270 747 008)